



## Specification / 产品规格

Base Type / 综合描述		Electrical/技术--电参数	
Base(Std designation) / 灯座	Screw E26/27	Input Voltage / 输入电压	AC 85 - 240 V
Enclosure	Thermocool Polymer	Frequency / 频率	50-60 Hz
Lens and Base cap	Polycarbonate- UV sheild	Direct Input Current / 直接室电	Yes
Assmby / 组装	Full insulated plug type	Ballast Type (if input) / 镇流器	Magnetic
Connectors / 连接	Copper Plated ( UL 94 )	Power Consumption / 输出功率	8.5 Watts
LED / 光源		Driver output Voltage/ 输出电压	DC 9.6 V - 24 V
RoHS	Yes	Construction Current / 电流	300mA
CE (World wide)	Yes	Power Efficiency / 效率	> 86 % @ 230 V
TuV \ CB (For European Union)	Yes	Driver package / 驱动电源	Frame retardant insulated
PSB (For Singapore only)	No	EMC Approval / 高压测试	Yes

Light Range/技术--光参数		Options/可选配置			
CCT Colour temp. / 色温	Warm	Color Designation / 灯光色调	Warm	Day warm	Cool
	Day warm	Color Temperature (k) / 色温	3000k	4250	6500k
	Cool	Enclosure / 灯罩	Frost		
Dimmable / 能否调光	No	Packaging Type / 包装规格	Industrial	Commercial	
CR Index / 显色指数	Ra 75 - 85	Max : 5 Watts 470 lm			
Luminous flux / 光流量	Max : 725 lm	Luminous Efficacy / 光效	85 lm / watt		
		Beam angle / 光束角度	180° @ min 20%		

Rated Life/技术--寿命		Packaging/包装	
Rated Life / 预计寿命	48,000hours	Packing Size/Wgt per Piece	75*75*135mm/100g/1PC
Ambient Temp / 环境温度	(-15 to 42)°C	Qty per box	40 Pcs
Warranty / 保用	2 years Home	Packing Size/Wgt per Box	420*340*280mm 4.50KG

Ecco Sys Pte Ltd Mail: sales@ecco-sys.com Tel : (65)6447 8587 Fax: (65)6447 9493

# Revolutionary State-of-the-art Thermocool Material




**88 grams**

• Feather weight



• Draws heat away instantly

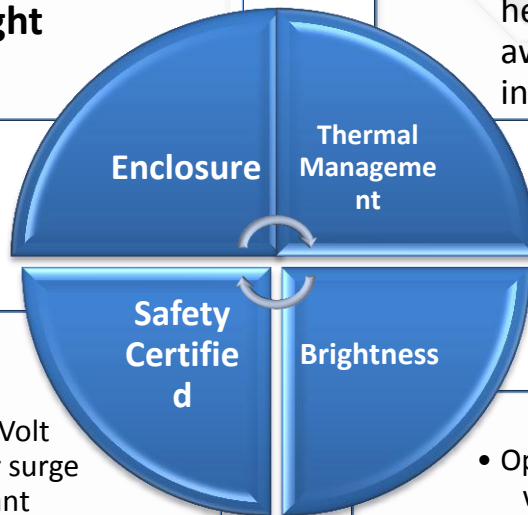

Enclosure

Thermal Management

Safety Certified

Brightness

• 4,000 Volt power surge resistant  
• Fire Redundant grade

• Optical Lens with 180 degree light angle

